



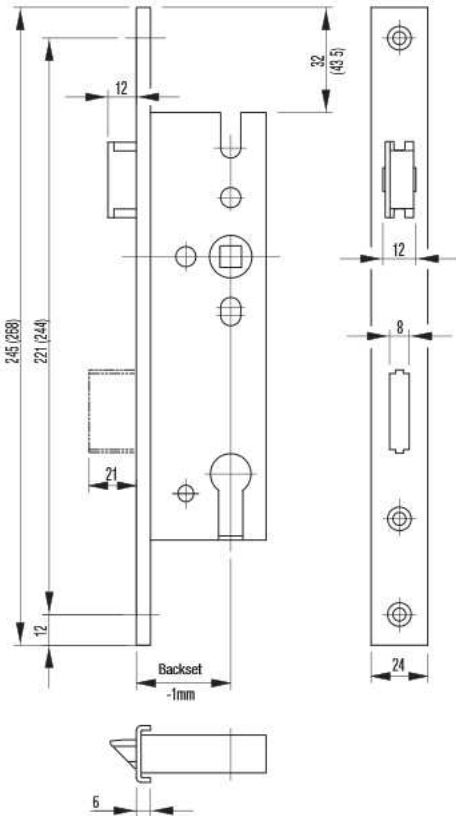

CE
EN 12209

3	S	3	0	0	C	3	B	A	2	0
---	---	---	---	---	---	---	---	---	---	---

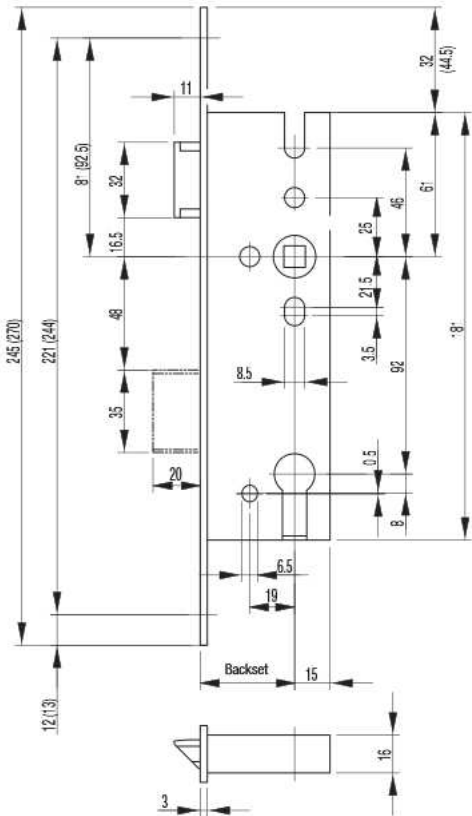

Variants / Order numbers

Narrow stile lock

Forend Material/Finish	Backset mm	Forend ends	24 x 3 x 245 mm non-handed
Stainless steel	25	square	B 1314 0001
	30	square	B 1314 0002
	35	square	B 1314 0003
	40	square	B 1314 0004
	45	square	B 1314 0005
Nickel-silver painted steel	25	square	B 1314 0011
	30	square	B 1314 0012
	35	square	B 1314 0013
	40	square	B 1314 0014
	45	square	B 1314 0015

Forend Material/Finish	Backset mm	Forend ends	U-shaped forend 24 x 6 x 245 mm non-handed
Stainless steel	24	square	B 1314 0031
	29	square	B 1314 0032
	34	square	B 1314 0033
	39	square	B 1314 0034
	44	square	B 1314 0035

Forend Material/Finish	Backset mm	Forend ends	24 x 3 x 270 mm non-handed
Stainless steel	25	square	B 1314 0081
	30	square	B 1314 0082
	35	square	B 1314 0083
	40	square	B 1314 0084
	45	square	B 1314 0085
Nickel-silver painted steel	25	square	B 1314 0091
	30	square	B 1314 0092
	35	square	B 1314 0093
	40	square	B 1314 0094
	45	square	B 1314 0095

Forend Material/Finish	Backset mm	Forend ends	U-shaped forend 24 x 6 x 268 mm non-handed
Stainless steel	24	square	B 1314 0021
	29	square	B 1314 0022
	34	square	B 1314 0023
	39	square	B 1314 0024
	44	square	B 1314 0025

Further options (on request)

Finish	Forend Width	Follower	Backset mm	Special variants	Suitable striking plates
		9 mm 10 mm		Deadbolt monitoring (from 35 mm spindle length) Deadbolt with anti-saw feature (from 30 mm spindle length) Swiss round cylinder bore	B 9000 1015 B 9000 1017 B 9000 1045 B 9000 1047

Specification clause

BKS mortise lock 1314 for narrow stile doors; stainless (or nickel-silver painted) steel forend with square ends, flat type 24 mm x 3 mm, U-shaped type 24 mm x 6 mm; galvanised lock case; with assembly-friendly guide for the cylinder fixing screw; through-fixing of narrow stile fittings with connecting screws up to M 8, screw holes around follower; 8 mm follower square; non-handed latch; zinc die cast deadbolt with 20 mm single throw; with latch lever; 15 mm behind backset; 92 mm centre distance; backset ____ mm